


Mono



Powerguard insurance global coverage

Within the first year, the output power shall not be less than 96.5% of the minimum output power in CSUN's product datasheet, thereafter the loss of output power shall not exceed 0.68% per year, ending with 80.18% in the 25th year.

■ CSUN ■ Standard warranty

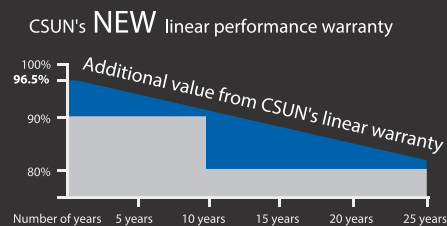

CSUN270-60M

Highest efficiency offer: QSAR™



CSUN255-60M CSUN260-60M
CSUN265-60M CSUN270-60M

19%
Cell efficiency

270 W
Highest power output

10 Jahre
Material & workmanship warranty

25 Jahre
Linear power output warranty



Higher efficiency – perfect for rooftop projects



Positive tolerance offer



Excellent current distribution performance reduces power loss



Passed salt mist & ammonia corrosion, blowing sand and hail testing



Certificated to withstand wind (2400 Pa) and snow load (5400 Pa)



Excellent performance under weak light conditions



Good temperature coefficient performance enables better output in tropical zones

- CSUN, established in 2004, is a hi-tech corporation with its core business in R&D, manufacturing, and sale of high efficiency silicon based solar cells and modules.
- As one of the leading PV enterprises in the world, CSUN has delivered more than 1GW solar products, to residential, commercial, utility and off-grid projects all around the world.
- Through strict selection of raw materials, stringent quality control and rigorous test in state of the art facilities in Istanbul, Nanjing and Shanghai, CSUN has always committed to higher efficiency, more stable and better cost performance products.

QSAR™ is the trade mark owned by CSUN, also the brand name of high efficiency solar module produced by CSUN. From March 2012, CSUN will change "QUASAR" originally used into "QSAR".

All information and data are subject to change without notice.



www.csun-solar.com



All rights reserved by CSUN
Version 3/2014-ENG

Electrical characteristics at Standard Test Conditions (STC)

Module	QSAR 270-60M	QSAR 265-60M	QSAR 260-60M	QSAR 255-60M
Maximum Power - P _{mpp} (W)	270	265	260	255
Positive power tolerance	0~3%	0~3%	0~3%	0~3%
Open Circuit Voltage - V _{oc} (V)	38.3	38.2	38.1	38.0
Short Circuit Current - I _{sc} (A)	9.07	8.98	8.90	8.82
Maximum Power Voltage - V _{mp} (V)	31.2	31,0	30,8	30.7
Maximum Power Current - I _{mp} (A)	8.65	8.55	8.44	8.30
Module efficiency	16.63%	16.32%	16.01%	15.70%

Electrical data relates to standard test conditions (STC) : irradiance 1000W/m² ; AM 1.5 ; cell temperature 25°C measuring uncertainty of power is within ±3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL 1703.

Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Module	QSAR 270-60M	QSAR 265-60M	QSAR 260-60M	QSAR 255-60M
Maximum Power - P _{mpp} (W)	198	195	192	188
Maximum Power Voltage - V _{mp} (V)	28.8	28.6	28.4	28.1
Maximum Power Current - I _{mp} (A)	6.88	6.82	6.76	6.68
Open Circuit Voltage - V _{oc} (V)	35.3	35.2	35.1	35
Short Circuit Current - I _{sc} (A)	7.36	7.28	7.19	7.12

Electrical data relates to normal operating cell temperature (NOCT): irradiance 800 W/m² ; wind speed 1 m/s ; cell temperature 45°C ambient temperature 20°C measuring uncertainty of power is within ±3%

Temperature Characteristics

Voltage Temperature Coefficient	-0.307%/K
Current Temperature Coefficient	+0.039%/K
Power Temperature Coefficient	-0.423%/K

Maximum Ratings

Maximum system voltage (V)	1000
Series fuse rating (A)	20
Reverse current overload (A)	27

Mechanical Characteristics

Dimensions	1640 × 990 × 35 mm
Weight	18.3 kg
Frame	Anodized aluminum profile
Front glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6 × 10 pieces monocrystalline solar cells series strings (156 mm × 156 mm)
Junction Box	Rated current ≥ 12A, IP ≥ 65, TUV & UL
Cable	Length 900 mm, 1 × 4 mm ²
Connector	MC 4/ compatible with MC 4

Packaging


Container 20'	360 pcs.
Container 40'	840 pcs.
Container 40'HC	896 pcs.

System Design

Temp. range	-40°C to + 85°C
Hail	max. diameter of 25mm with impact speed of 23m/s
Max. capacity	Snow 5400 Pa, wind 2400 Pa
Application class	A
Safety class	II

Dimensions

Note: Module layout below only valid for modules with 35mm thickness. All dimensions in mm (inch).

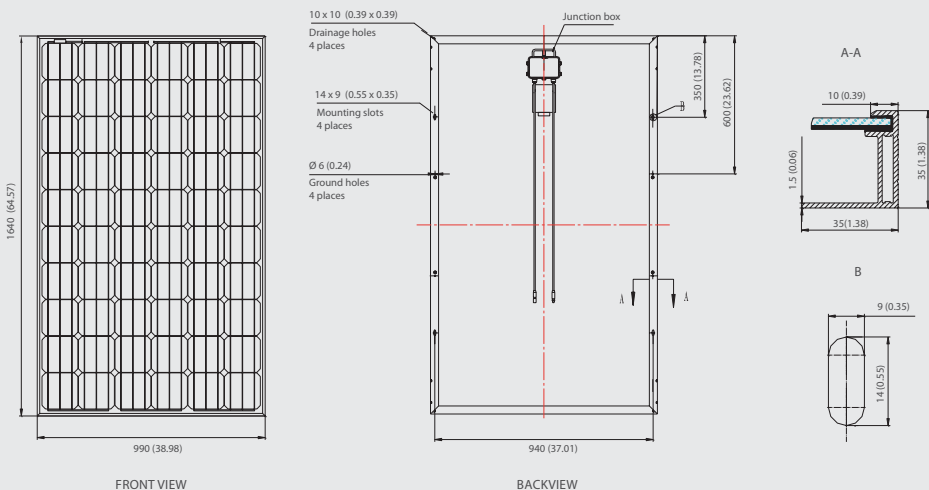

IV-Curves

